

Model: PF27MU

Features:

Self-priming centrifugal frame mounted pumps designed for Industrial, Municipal and Marine applications.


- **SUCTION/DISCHARGE:** 4" x 4" NPT, Female
- **LIQUID TEMPERATURE:** 160°F Continuous
- **CASING:** Gray Iron, ASTM A48, Class 30
- **BEARING HOUSING:** Gray Iron, ASTM A48, Class 30
- **SUCTION GLAND:** Gray Iron, ASTM A48, Class 30
- **PEDESTAL:** Gray Iron, ASTM A48, Class 30
- **PAINT:** Air dry enamel
- **O-RINGS:** Buna-N
- **SHAFT:** Steel
- **SHAFT SLEEVE:** Steel
- **HARDWARE:** Steel
- **SHIM SET:** Stainless steel
- **IMPELLER:** 3 vane, Semi-Open, 7/8" Dia., Spherical Solids handling, Gray Iron, ASTM A48, Class 30,
- **SEAL:** Mechanical, type 21, Carbon/Ceramic/Buna-N,
- **CHECK VALVE:** Rubber with canvas cover and steel weights
- **BEARING-DRIVE END:** Double Row, Ball, Oil Lubricated
- **BEARING-PUMP END:** Single Row, Ball, Oil Lubricated
- **WARRANTY:** 1 year
- **WEIGHT:** 233 lbs

 **WARNING: CANCER AND REPRODUCTIVE HARM-**
WWW.P65WARNINGS.CA.GOV



Self-Priming, Frame Mounted, Trash Handling Pumps Universal Drive

Not for pumping flammable liquids or hazardous materials that is not compatible with pump materials.

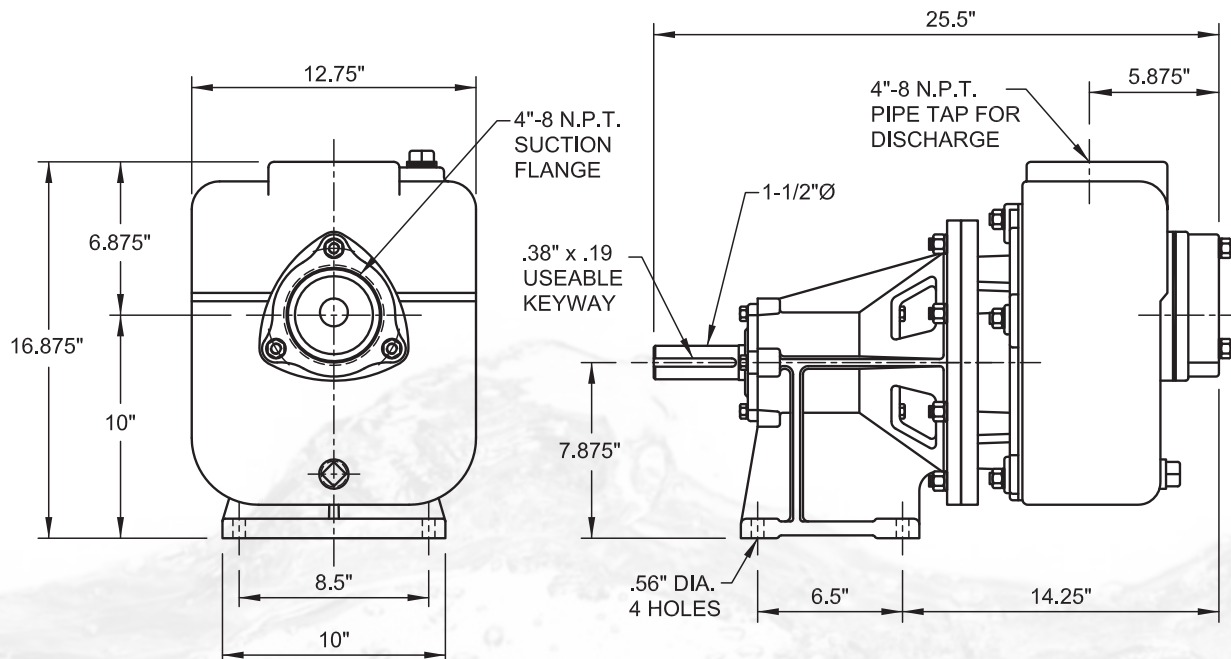

Power-Flo Pumps & Systems

a Power-Flo Technologies company

877-24PUMPS • fax: 516-812-6897 • www.powerflopumps.com

Self-Priming Centrifugal Pumps - PFMU - 4" x 4" NPT

Sect.
SP
Page
31
Rev.
02/2021

Model: PF27MU

Self-Priming Centrifugal Pumps - PFMU - 4" x 4" NPT

